

## Technical information

# Boxer 42XL



### Characteristics

- Supplied with one sealing bar as standard (front)
- Double seal as standard (two sealing wires).  
Optional at no extra cost: Cut-off/Wide seal
- Easy-to-remove sealing bar for easy cleaning
- Pump maintenance and cleaning program
- Digital time control with ten-program memory as standard
- Soft Air as standard to protect the product and vacuum bag
- Stainless steel casing and transparent lid
- Supplied with three insert plates for a faster cycle and good product positioning

### Options

- Second sealing bar
- 1-2 Cut-off seal
- Sensor control
- Advanced Control System (ACS)
- Liquid control
- Gas flush
- Bi-Active seal


### Accessories

- Thermal label printer (only in combination with ACS)
- Inclined insert plate (for liquids and powders)
- External adapter
- Maintenance set for standard maintenance
- Trolley with shelves



Specs	Boxer 42XL				
Chamber LxWxH (mm)	460x420x180				
Machine LxWxH (mm)	615x490x440				
Voltage	230V-1-50Hz 100V-1-50/60Hz 110/115V-1-60Hz 220V-1-60Hz				
Pump capacity 50 Hz/60 Hz (m3)	21 / 25				
Machine cycle 50 Hz/60 Hz (sec.)	13-35 / 11 - 31				
Power (kW)	0,8 - 1,0				
Weight (kg)	72				
Net seal length (mm)	410				
Sealing bar configuration - standard - option	<table border="0"> <tr> <td style="text-align: center;">standard</td> <td style="text-align: center;">option</td> </tr> <tr> <td style="text-align: center;"> </td> <td style="text-align: center;"> </td> </tr> </table>	standard	option		
standard	option				

### Dimensions mm

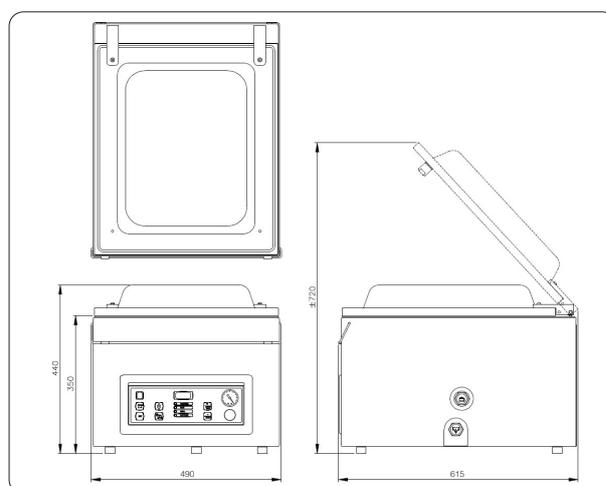

**Henkelman BV**  
Titaniumlaan 10  
5221 CK 's-Hertogenbosch  
The Netherlands  
+31 73 621 36 71

**Sales support**  
info@henkelman.com

**Service/technische support**  
service@henkelman.com